

DuPont™ Kalrez® 9500


For Semiconductor SACVD and Ash/Strip Processes

Preliminary Product Data Sheet — June, 2011

Product Description

DuPont™ Kalrez® 9500 perfluoroelastomer parts are a tan product targeted specifically for deposition processes where ozone is used for processing, e.g. SACVD, PECVD UV-cure chamber, PECVD ultra-low K (BLOK™) and ash/strip processes. It has been specifically designed for use in applications where the plasma environment is more “chemical”, i.e., where oxygen and fluorine radicals are more dominant.

Kalrez® 9500 exhibits excellent resistance to CVD and ash/strip process chemistry, i.e., ozone, ammonia and water vapor. It also offers outstanding thermal stability, very low outgassing and excellent mechanical strength and is well suited for both static and dynamic sealing applications. A maximum continuous service temperature of 310 °C is suggested. Kalrez® 9500 can also withstand short-term excursions up to 325 °C. Ultrapure post-cleaning and packaging is standard for all Kalrez® 9500 parts.

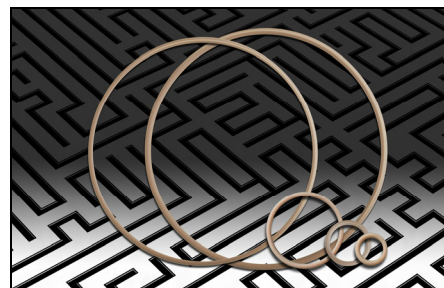

Kalrez® 9500 parts are based on a proprietary crosslinking system developed by DuPont.

Features/Benefits

- Excellent resistance to CVD and ash/strip process chemistry (ozone, ammonia, water vapor, etc.)
- Low erosion rate and ultra-low particle generation in radical dominant oxygen and fluorine-based plasmas
- Excellent thermal stability
- Very low outgassing and metals content
- Excellent mechanical strength

Suggested Applications

- Gas inlet/orifice/mixing block seals
- Chamber lid seals
- Isolation valve seals
- Bonded gate valves/slit valve door seals

Ozone Resistance

Ozone is routinely used for processing in SACVD processes. It can attack the crosslinking structure of elastomeric seal materials causing a loss of sealing functionality (compression set resistance) to occur.

Typical Physical Properties¹

Color	Tan
Hardness, Shore A (Plied Slab) ²	75
Hardness, Shore M (O-ring) ³	80
100% Modulus ⁴ , MPa	5.67
Tensile Strength at Break ⁴ , MPa	11.29
Elongation at Break ⁴ , %	176
Compression Set ⁵ , %	
70 hr at 204 °C	22
70 hr at 250 °C	36
70 hr at 310 °C	59
Maximum Continuous Service, Temperature ⁶ , °C	310

¹ Not to be used for specification purposes

² ASTM D2240 (plied slab test specimens)

³ ASTM D2240 & D1414 (AS568 K214 O-ring test specimens)

⁴ ASTM D412 & D1414 (AS568 K214 O-ring test specimens)


⁵ ASTM D395B & D1414 (AS568 K214 O-ring test specimens)

⁶ DuPont proprietary test method



The miracles of science™


The chart to the right shows the compression set properties of Kalrez® 9500 versus Kalrez® 8085 after exposure to 7.4% ozone by volume for 10 hours @ 100°C. Kalrez® 9500 was largely unaffected and retained its sealing functionality better than Kalrez® 8085.

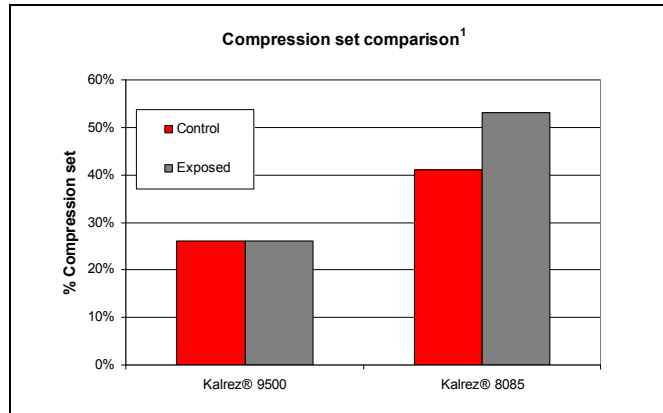

¹ASTM D395 & D1414 AS568 K214 O-ring test specimens

Plasma Weight Loss

Because there is no industry standard to characterize elastomer plasma resistance, OEMs and Fablines refer to in-use testing and actual performance. To further assist the industry in proper seal selection, DuPont has developed a test method that closely approximates chamber conditions to quantify seal resistance to plasma. In this test, O-rings are placed on a silicon wafer and directly exposed to extremely damaging plasma environments. Kalrez® 9500 exhibited the lowest weight loss upon exposure to radical dominant oxygen and fluorine-based plasma versus the other perfluoroelastomers tested.

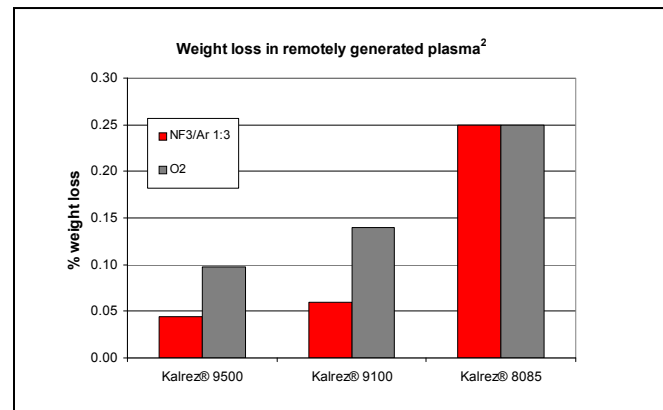

²DuPont proprietary test method

Note: Color variations may be observed in DuPont™ Kalrez® 9500 parts. Variations are considered to be cosmetic. Please contact a Kalrez® Application Engineer if you have any questions or if you need any additional information.

Marks (Dark Spots)

Small marks (dark spots) may be present in Kalrez® 9500 parts. The mark (dark spot) is a result of the curing process and is inherent in the part. It is not indicative of foreign matter and is not expected to have an adverse effect on the performance of the part in service.

Visit us at kalrez.dupont.com or vespel.dupont.com

Contact DuPont at the following regional locations:

North America
800-222-8377

Latin America
+0800 17 17 15

Europe, Middle East, Africa
+41 22 717 51 11

Greater China
+86-400-8851-888

ASEAN
+65-6586-3688

Japan
+81-3-5521-8484

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer service representative and read Medical Caution Statement H-50103-3.

Copyright © 2011 DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™, Kalrez®, and Vespel® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved. BLOK™ is a trademark of Applied Materials, Inc.

(06/11) Reference No. KZE-A10956-00-A0611



The miracles of science™